



The base frame **TU** is very versatile and flexible thanks to its modular construction.

The maximum load power is 350 kg, 600 kg or 800 kg depending on the pump version. The max. height adjustment range is 500 mm.


The **TU-4** base frame consists of 4 legs, a rear crossbar and 2 side crossbars. These are screwed on to the plate welded to the leg. Various screws to mount the table top are included with your order. The base frame is delivered unassembled.

Please note that a pump with hand crank or electric drive unit is also required.

Assembly and operating instructions are included with every delivery. They can also be downloaded from **www.ergoswiss.com**.



Dimensions of base frame **TU**

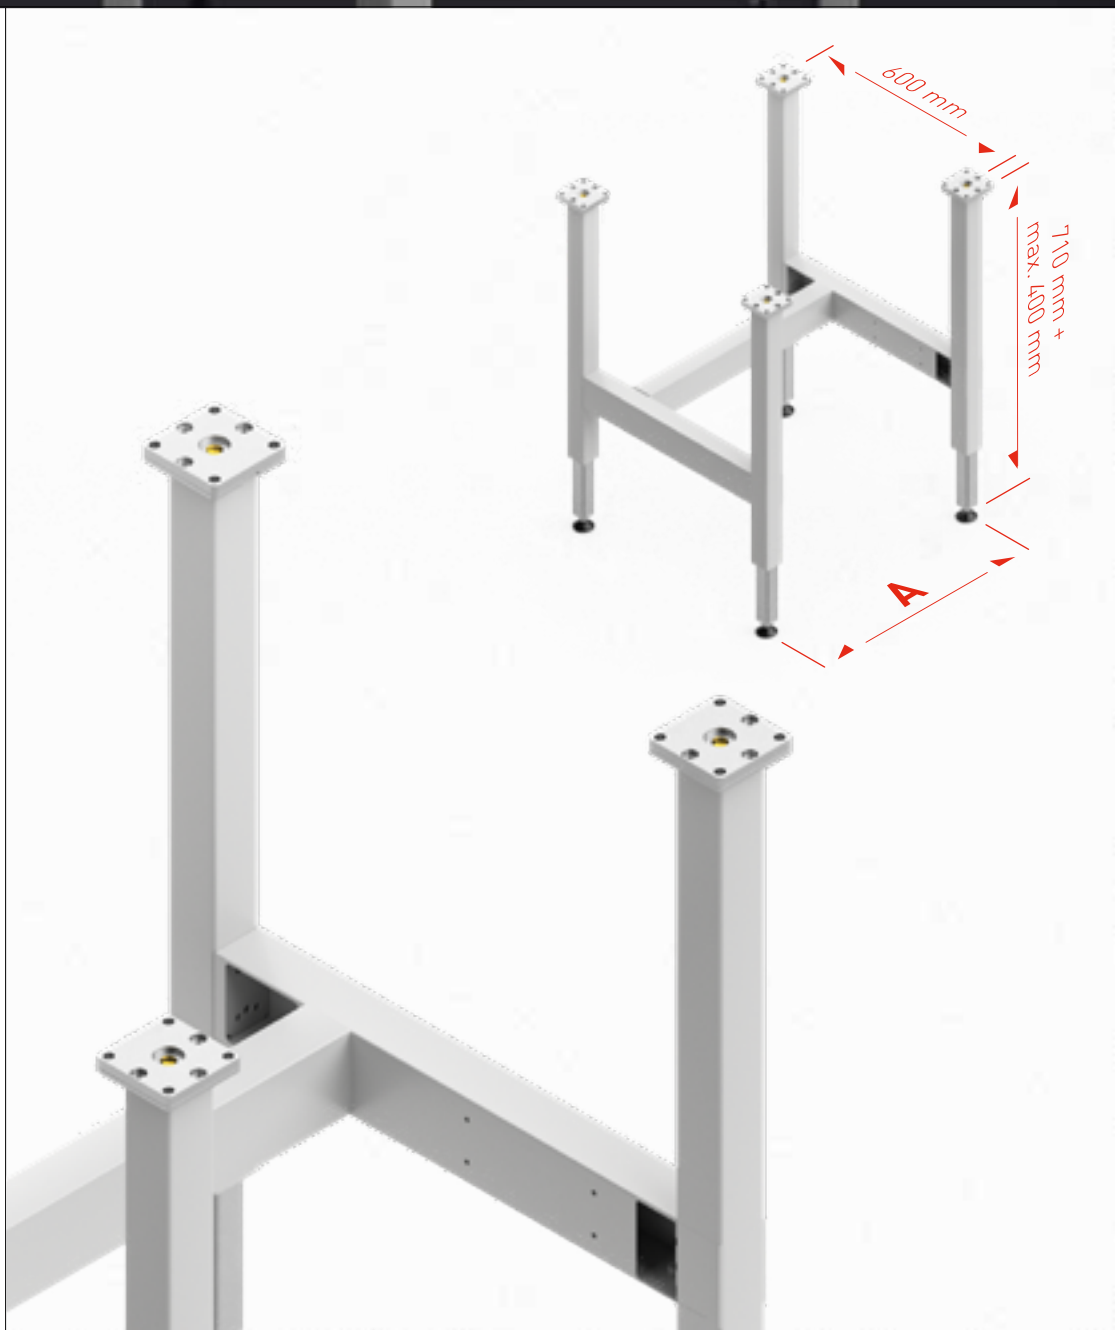

Base frame **TU-4**

	A
TU-4 1000	1000 mm
TU-4 1200	1200 mm
TU-4 1600	1600 mm

Detailed CAD drawings in various formats can be found at www.ergoswiss.com.